


| SPECIFICATIONS | | |
|----------------------|-------------------------|--------|
| MOTOR | 1.5Kw 3ø 4P AC44V, 60Hz | |
| OPERATING FORCE | MAX | 4500kg |
| | MIN | 4000kg |
| MAX. NO LOAD SPEED | 11.5 mm/sec | |
| OPERATING HYD. PRESS | 2.8 MPa | |
| OPERATING HYD. FLOW | 18 L/min | |
| JET PIPE HYD. PRESS | 0.6 MPa | |
| INSTALLATION | HORIZONTAL | |
| AMBIENT TEMP. | -10°C~40°C | |
| REQUIRED OIL Q'TY | 27L | |

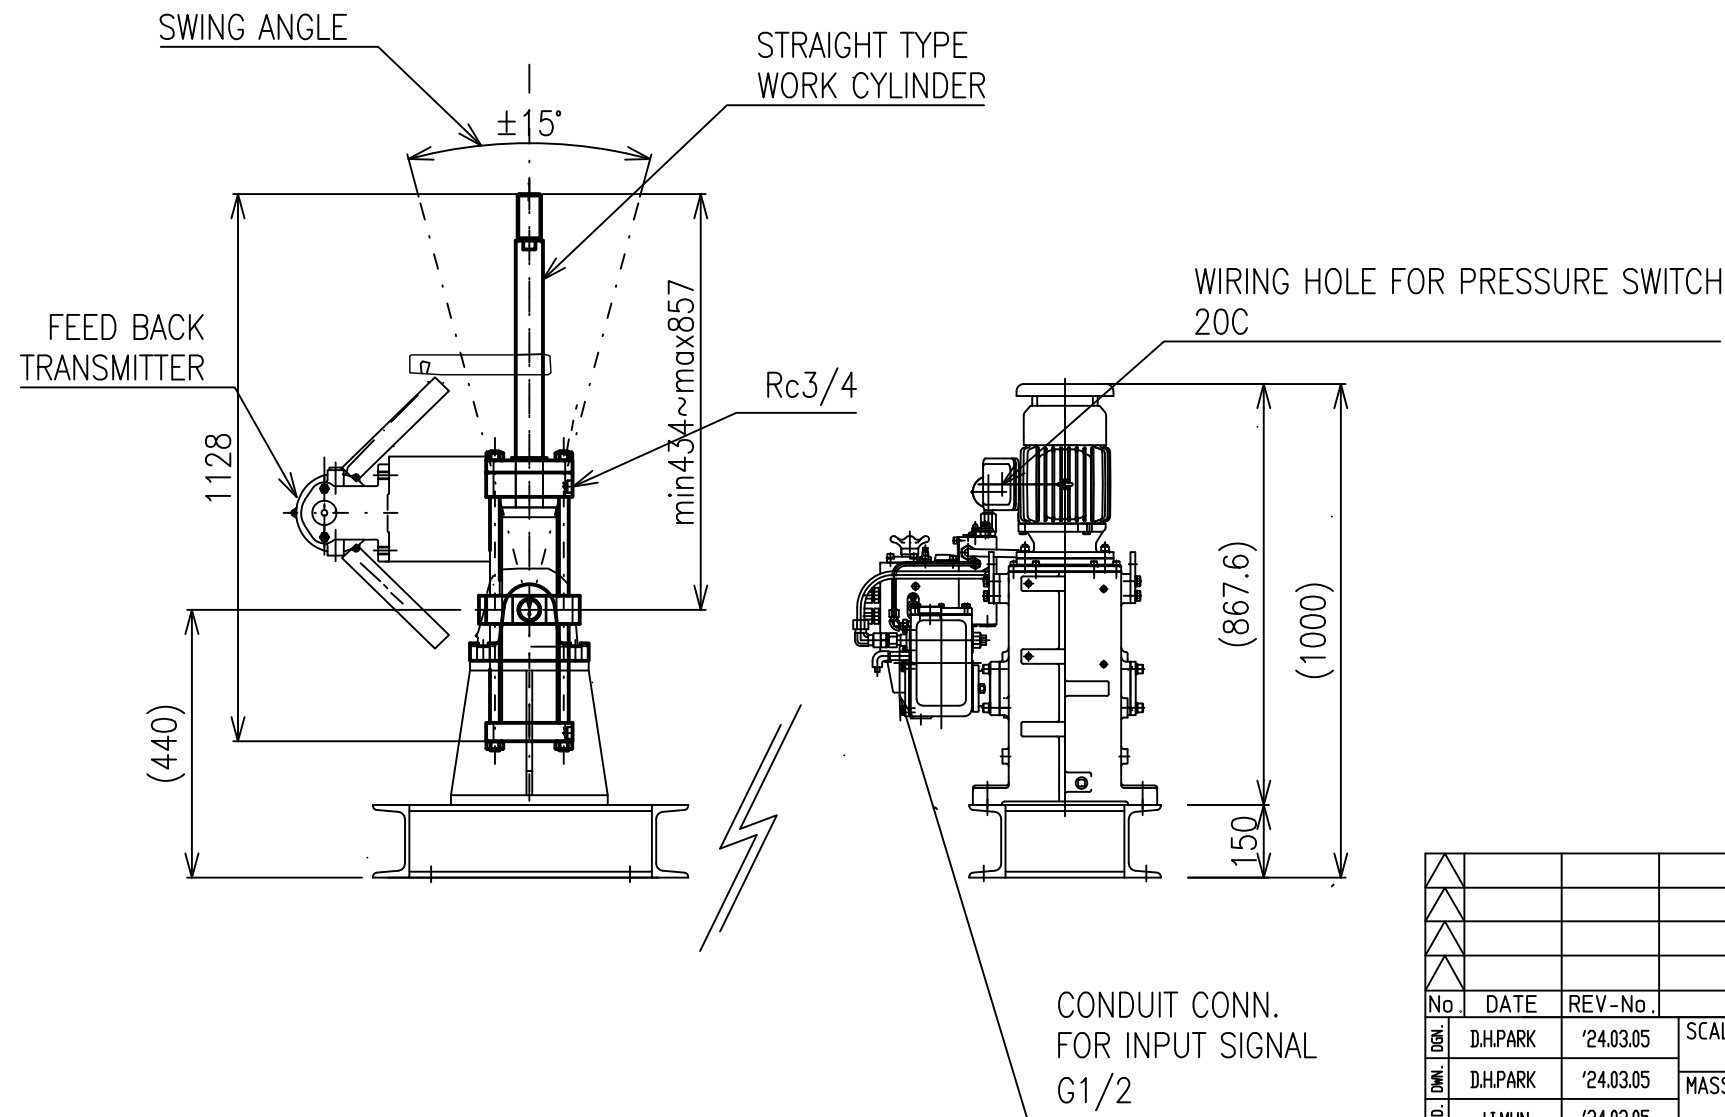

| | | | | | | | | |
|-------|----------|-----------|--------------|--|---------------|---------------------------|-----------------------|--|
| ▲ | | | | | | BOILER EXHAUST FAN DAMPER | | |
| ▲ | | | | | | EHJ21 E-H ACTUATOR | | |
| ▲ | | | | | | OUTLINE DRAWING | | |
| No. | DATE | REV-No. | DESCRIPTION | | REV. | CKD. | | |
| DGN. | D.H.PARK | '24.03.05 | SCALE | | NONE | | DRG. No. PKM-20240000 | |
| DWN. | D.H.PARK | '24.03.05 | MASS APPROX. | | 480 kg | | | |
| CKD. | J.I.MUN | '24.03.05 | ORDER No. | | KNIRECO KOREA | | | |
| APPD. | J.I.MUN | '24.03.05 | | | P / | | | |